

SECURE. FLEXIBLE. COMPLETE.

VEGA™



VEGA + VEGA-RC

Vega™ is the new global standard for AWP and payment terminals. Fully featured and lower cost, Vega is a complete validator with a lockable, removable cash box, diversified options and an optional bill recycler, perfect for you and for your customers.

FEATURES

- Highly secure
- Optional bill recycling unit
- 30-note variable denomination recycler unit
- High-precision sensor technology
- Lockable, removable cashbox
- Combination of optical sensors and flapper mechanism
- Software upgrade via USB port
- 300 and 1,000 note cash box options

BENEFITS

- Perfect for AWP, vending and payment terminals
- Virtually eliminates coin hopper starvation
- Increases revenue up to 40%
- Assures the best acceptance rate and most secure validation
- Highly secure, removes easily for counting
- Prevents stringing of banknotes and fraud activities
- Software downloads can be done in less than one minute
- Allows you to choose the best options for you

INSERTION

- Lengthwise, 110~165mm
- Width range is 60~82mm

VALIDATION SPEED

- Stack completion approximately 3 seconds (Vega only)
- Approximately 3 seconds (from bill insertion to stack into recycler)
- Approximately 2 seconds (From recycler to dispense banknote)

CASH BOX

- Capacity approximately 300 notes (1,000 notes option)
- Access rear or front (SH type), Upward (SU/SD type)

RECYCLER

- Capacity up to 30 notes (150mm new notes/I.E., 100 Euro bill)

ESCROW

- 1 banknote without RC
- 5 banknote with RC

INTERFACE

- Photo-coupler isolation: Rs232C

PROTOCOL

- Serial, cc-Talk, Pulse, MDB
- Interior use only (Vega + VegaRC)
- Multiple protocols in one software

DIMENSIONS

- 104mm (w) x 233.5mm (D) x 168mm (H) (Vega)
- 104mm (W) x 233.5mm (D) x 285mm (H) (Vega-RC)

WEIGHT

- Unit 2 kg / 4.4 lbs
- Cash box 0.8 kg / 1.76 lbs
- Unit and cash box 3.9 kg / 8.5 lbs

INSTALLATION

- This unit can be mounted to operate in a horizontal, down stack or up stack up position, giving the user maximum banknote validation flexibility.

MAINTENANCE

- All major areas including the bill path are accessible without the use of tools

ENVIRONMENT


- Operating 0 °C ~ 50 °C
- Storage -20 °C ~ 60 °C
- Operating Humidity 30% ~ 80% RH (non-condensed)
- Storage Humidity 10% ~ 85% RH (non-condensed)

POWER REQUIREMENTS

- DC 12V (±5%), 2.0A recommended
- DC 12V (±5%), 5.0A recommended (Vega + Vega-RC)
- DC 20V to DC 42.5V, 2.5A recommended (option)
- Standby 0.2A (DC 12V), operate 0.7A (Max. 0.8A) (DC 12V)

APPROVALS

- CE/UL

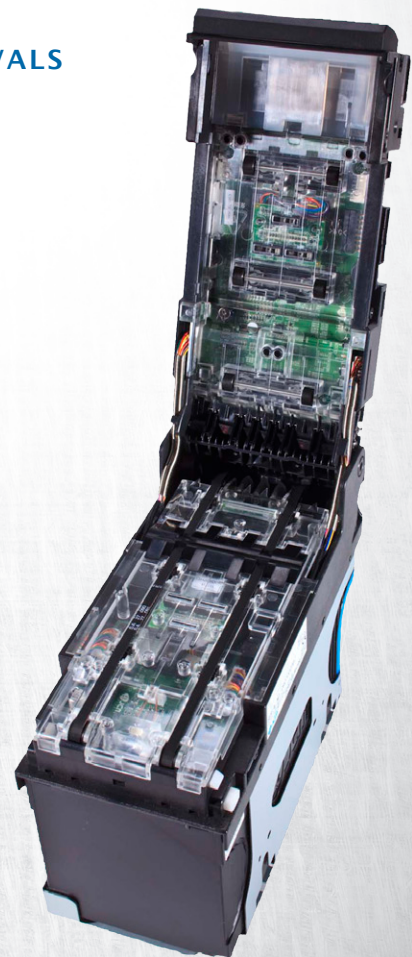

JAPAN: 81.6.6703.8400 • US: 702.651.0000 • US: 800.683.7248 • UK: +44.0.1908.377.331

jcmglobal.com